
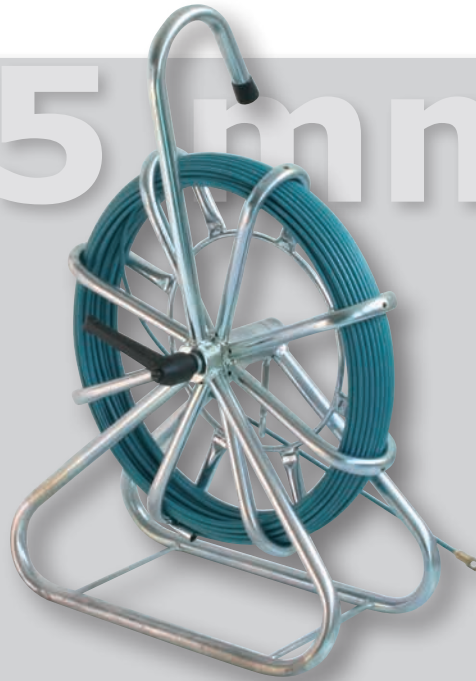


ø 4,5 mm



Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Sujeto a variaciones técnicas sin previo aviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso.

EN	D	E	F	I
Fiberglass Rod VOLTAFOX ø 4,5 mm with Polypropylene outer coating comes spooled on a vertical galvanized steel cage with reel ø 330 mm with starting/ending M5 threaded ends and starting spinner with pulling eyelet.	Kabeleinziehgerät VOLTAFOX mit Glasfaserstab ø 4,5 mm mit Polypropylen-Ummantelung, komplett mit Anfangs/Endhülse M5 und Zugkopf M5 mit Öse. Aufgespult auf verzinkter Stahlhaspel in stehender Ausführung mit Korbdurchmesser 330 mm .	Guía pasacables VOLTAFOX de fibra de vidrio ø 4,5 mm con capa externa en polipropileno, con casquillos rosca-dos iniciales/finales M5 y cabeza ojal inicial M5 y con contenedor vertical de acero zincado ø 330 mm .	Sonde de tirage VOLTAFOX en fibre de verre ø 4,5 mm, gaine extérieure en polypropylène, douilles filetées d'extrémité M5 et embout initial M5 avec œillet. Montée sur enrouleur vertical en acier galvanisé ø 330 mm .	Sonda passacavi VOLTAFOX in fibra di vetro ø 4,5 mm, con rivestimento esterno in polipropilene completa di raccordi iniziali/finali M5 e ogiva iniziale M5 con foro. Montata su aspo raccogliitore verticale in acciaio zincato ø 330 mm .
Dimensions: 360 x 185 x 550 mm Packaging dimensions: 375 x 215 x 570 mm	Abmessungen: 360 x 185 x 550 mm Abmessungen verpackt: 375 x 215 x 570 mm	Dimensiones: 360 x 185 x 550 mm Dimensiones de embalaje: 375 x 215 x 570 mm	Dimensions: 360 x 185 x 550 mm Dimensions de l'emballage: 375 x 215 x 570 mm	Dimensioni: 360 x 185 x 550 mm Dimensioni imballo: 375 x 215 x 570 mm

art.	RAL	art.	ø mm	m	kg
GVFO20MB	9017-SC ■ + CU	GVFO20SCC	4,5	20	3,5
GVFO30MB	5021-MB ■	GVFO30SCC		30	3,7
GVFO40MB	9002-NA ■	GVFO40SCC		40	3,9
GVFO50MB	3020-RO ■	GVFO50SCC		50	4,2
GVFO60MB	2004-OR ■	GVFO60SCC		60	4,4
GVFO70MB	1003-GE ■	GVFO70SCC		70	4,6
GVFO80MB	6018-HG ■	GVFO80SCC		80	4,8
	5015-HB ■				
	5022-DB ■				

ø 330 mm

ø 4,5 mm	ø 10-60 mm	+++	310 mm	1100 kg	170 kg	20-100 (+ 3÷5) m