


AL



JKB-K238a

- |  |   |   |   |  |
|--|---|---|---|--|
| <p><b>EN</b><br/>Aluminium alloy spindle, with both turning ends, mounted on self-lubricating bushing and shape.</p> | <p><b>D</b><br/>Trommelwelle aus Aluminium, drehbar, mit selbstschmierende Gleitlagerbuchsen. Nuten ideal für die Aufnahme auf standard Kabeltrommel-Hebeböcke.</p> | <p><b>E</b><br/>Eje tubular de aluminio, giratorio, con buje autolubrificantes. Muestras ideales para gatos de tambores de cables estándar.</p> | <p><b>F</b><br/>Arbre creux en aluminium, rotatif, avec des paliers lisses autolubrifiants. Encoches idéales pour des chevalets lève-bobines de support standard.</p> | <p><b>I</b><br/>Albero tubolare in lega leggera di alluminio, con estremità girevoli montate su bronzina autolubrificante, idoneo per supporti serie standard previste sui cavalletti.</p> |
|--|---|---|---|--|

art.	∅	L	L <sub>1</sub>			Fit for cable drum stands ... Geeignet für Kabeltrommelbock ... Adecuado para soporte tambor ... Approprié pour chevalets lève-bobines ... idoneo per cavaletto ...
JKB-K238a	60 mm	1750 mm	1500 mm	1800 kg	16,5 kg	JZ-KT2660
JKB-K239a	75 mm	1750 mm	1500 mm	5000 kg	22,0 kg	JZ-KT2670 - JZ-KT2680
JKB-K239b	75 mm	2050 mm	1800 mm	5000 kg	25,0 kg	JZ-KT2670 - JZ-KT2680
JKB-K239c	75 mm	2300 mm	2050 mm	5000 kg	27,5 kg	JZ-KT2670 - JZ-KT2680
JKB-K240a	90 mm	1750 mm	1500 mm	10000 kg	30,0 kg	JZ-KT2700
JKB-K240b	90 mm	2050 mm	1800 mm	10000 kg	34,0 kg	JZ-KT2700
JKB-K240c	90 mm	2300 mm	2050 mm	10000 kg	40,0 kg	JZ-KT2700

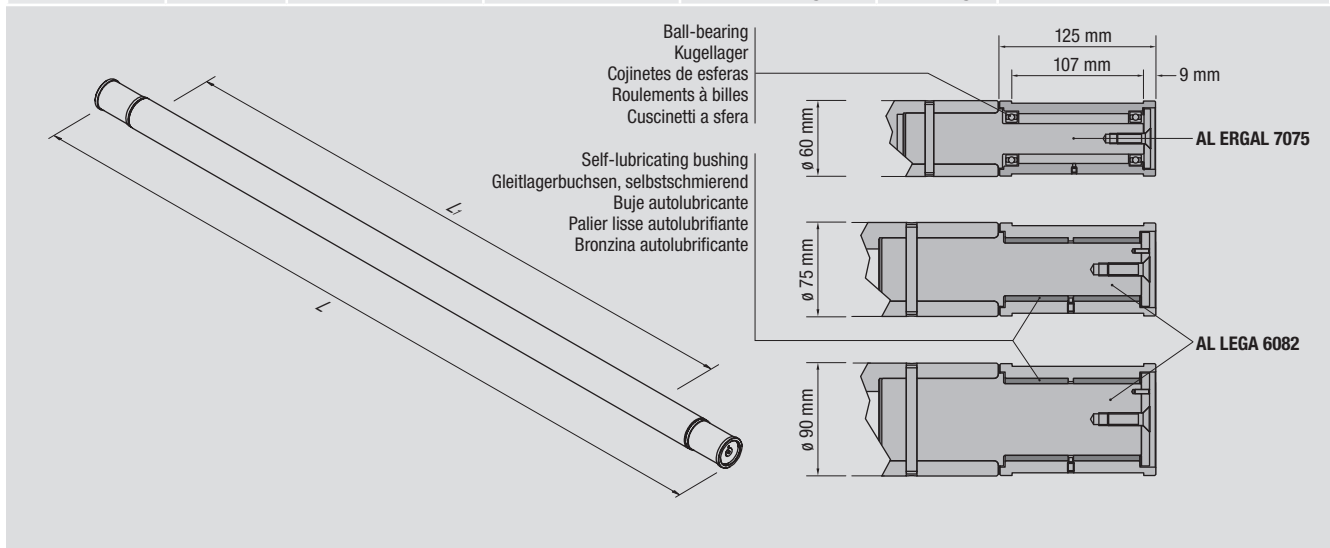

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Sujeto a variaciones técnicas sin previo aviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso.